



 NEVER COMPROMISE ON QUALITY AND SAFETY

ELEVATOR CATALOG

 **Schneider**TM
Lift & Escalator
Since 1992
www.asia-schneider.com 02 948 1663



*Actual Product might differ from pictures.

STANDARD CABIN FOR PASSENGER LIFT

CAR CEILING
ASC-G-01 Integrated Hairline Stainless Steel
with LED Lighting

CAR WALL
304 Hairline Stainless Steel

CAR DOOR
304 Hairline Stainless Steel

LANDING DOOR
304 Hairline Stainless Steel

COP & HOP
304 Hairline Stainless Steel with Dot-Matrix LED Screen
and ASB-M-01 push button


CAR FLOOR
ASF-G-01 PVC Floor

CAR CEILINGS

ASC-G-01



ASC-G-02

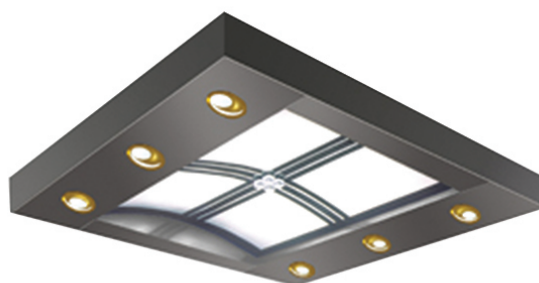

ASC-G-03



ASC-M-01



ASC-M-02



ASC-M-03

*Actual Product might differ from pictures.

ASC-G-01

Integrated Hairline Stainless Steel
with LED Lighting

ASC-G-02

Integrated Hairline Stainless Steel
with LED Lighting

ASC-G-03

Integrated Hairline Stainless Steel
with LED Lighting

ASC-M-01

Integrated Hairline Stainless Steel
with LED Lighting


ASC-M-02

Integrated Hairline Stainless Steel
with LED Lighting

ASC-M-03

Integrated Hairline Stainless Steel
with LED Lighting

DISPLAY TYPES



DOT-MATRIX



BLUE-SEGMENT
LCD (OPTIONAL)

PUSH BUTTONS



ASB-M-01



ASB-M-02



ASB-M-03



ASB-M-04



ASB-M-05



STANDARD



OPTIONAL

*Actual Product might differ from pictures.

AS-A-HOP 01
Hairline Stainless Steel with
Dot-Matrix LCD Display

AS-A-HOP 02
Hairline Stainless Steel with
Blue-Segment LCD Display

ASB-M-01
Round Hairline Stainless Steel
with Braille button.

ASB-M-03
Round Hairline Stainless Steel
with Braille button.

AS-A-COP 01
Hairline Stainless Steel with
Dot-Matrix LCD Display

AS-A-COP 02
Hairline Stainless Steel with
Blue-Segment LCD Display

ASB-M-02
Round Hairline Stainless Steel
with Goldish background color

ASB-M-04
Square Hairline Stainless Steel.

ASB-M-05
Square Hairline Stainless Steel
with Braille button.

HANDRAILS (Optional)

ASH-M-01



ASH-M-02



ASH-M-03



ASH-M-04




ASH-M-05




PVC FLOORS


ASF-G-01



ASF-G-02



ASF-G-03



ASF-M-01



ASF-M-02



*Actual Product might differ from pictures.

ASH-M-01
Round Hairline Stainless Steel

ASH-M-02
Round Hairline Stainless Steel

ASH-M-03
Round Hairline Stainless Steel

ASH-M-04
Flat Concaved
Hairline Stainless Steel

ASH-M-05
Flat Semi-Concaved
Hairline Stainless Steel

ASF-G-01
Marble-like PVC

ASF-G-02
Marble-like PVC

ASF-G-03
Marble-like PVC

ASF-M-01
Marble-like PVC

ASF-M-02
Marble-like PVC

PLANNING GUIDE FOR DIMENSIONS (DEEP CAR) 630 - 1000kg

Speed(m/s)	Capacity		Car Size	Door Opening(mm)	Single Opening		Through Opening	
	Person	Load(kg)	CWxCD (mmxmm)		Std. Hoistway Size	Min. Hoistway Size	Std. Hoistway Size	Min. Hoistway Size
					HWxHD (mmxmm)	HWxHD (mmxmm)	HWxHD (mmxmm)	HWxHD (mmxmm)
1.0, 1.5,1.75	8	630	1100x1400	CO 800	1850x1850	1750x1750 **	1850x1900	1750x1900 **
				CO 900 *	2000x1850	1950x1750	2000x1900	1950x1900
				SO 800/900 *	1750x1850 ***	1700x1825	1750x2050 ***	1700x2050
	10	800	1100x1700	CO 800	1850x2150	1750x2050	1850x2200	1750x2200
				CO 900 *	2000x2150	1950x2050	2000x2200	1950x2200
				SO 800/900 *	1750x2150 ***	1700x2125	1750x2350 ***	1700x2350
	13	1000	1100x2100	CO 800	1850x2550	1750x2450	1850x2600	1750x2600
				CO 900 *	2000x2550	1950x2450	2000x2600	1950x2600
				SO 800/900 *	1750x2550 ***	1700x2525	1750x2750 ***	1700x2750

PLANNING GUIDE FOR DIMENSIONS (WIDE CAR) 630 - 1000kg

Speed(m/s)	Capacity		Car Size	Door Opening(mm)	Single Opening		Through Opening	
	Person	Load(kg)	CWxCD (mmxmm)		Std. Hoistway Size	Min. Hoistway Size	Std. Hoistway Size	Min. Hoistway Size
					HWxHD (mmxmm)	HWxHD (mmxmm)	HWxHD (mmxmm)	HWxHD (mmxmm)
1.0, 1.5,1.75	10	800	1350x1400	CO 800	2000x1850 ***	1950x1750	2000x1900	1950x1900
				CO 900 *	2050x1850	1950x1750	2050x1900	1950x1900
				CO 1000 *	2150x1850	2150x1750	2150x1900	2150x1900
	13	1000	1600x1400	CO 900	2250x1850 ***	2200x1750	2250x1900	2200x1900
				CO 1000 *	2300x1850	2200x1750	2300x1900	2200x1900
				CO 1100 *	2400x1850	2350x1750	2400x1900	2350x1900

PLANNING GUIDE FOR DIMENSIONS (Overhead and Pit)

Speed (mm)	Max. Travel (m)	Std. OH (mm)	Min. OH (mm)	Std. PIT (mm)	Min. PIT (mm)	Car Clear Height (CIH) (mm)	Door Height (mm)
1.0	40	3830	3800 ****	1400	1350	2200 (with 100mm false ceiling)	2100
1.5	60	3980	3950 ****	1500	1500		
1.75	75	4080	4000 ****	1550	1500		

* Optional


** Center opening door offset (the centerline of center opening is not same as centerline of the car.

*** HW increases 50mm when A930-SD (MMR)

**** Min. OH is CIH 2200 with 70mm false ceiling.

Lift Shaft-SECTION VIEW


A920

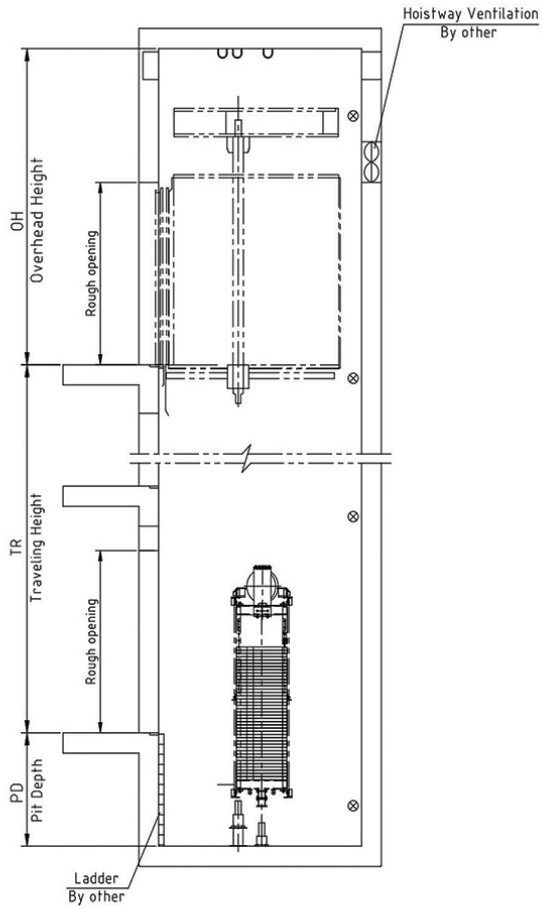



HOISTWAY PLAN(Top landing)

Lift Shaft-SECTION VIEW

A930-SD

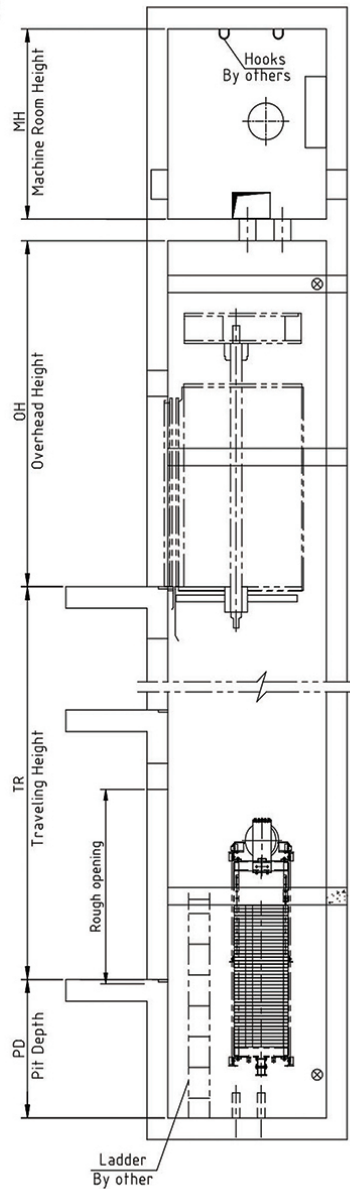


HOISTWAY PLAN

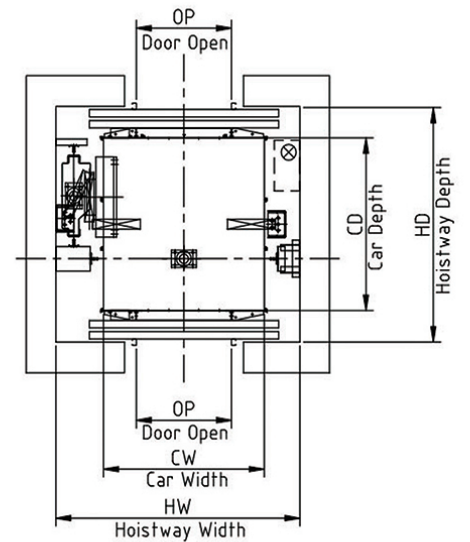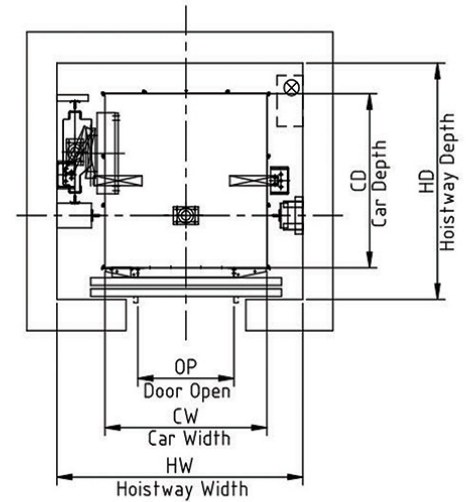


MACHINE ROOM PLAN

A920

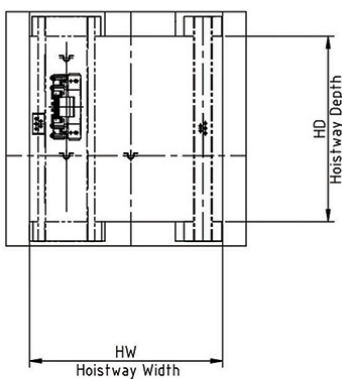

MACHINE ROOM PLAN

A930-SD

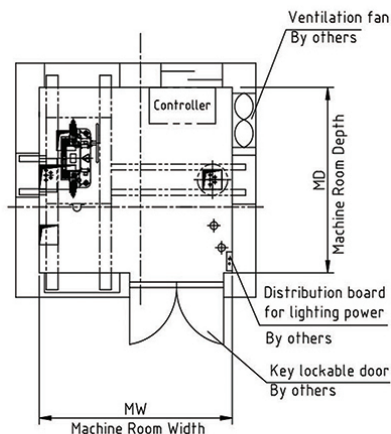

PLANNING GUIDE FOR DIMENSIONS (DEEP CAR) 1150 - 2000kg

Speed(m/s)	Capacity		Car Size CWxCD(mmxmm)	Door Opening(mm)	Std. Hoistway Size / HWxHD (mmxmm)	
	Person	Load(kg)			Single Opening	Through Opening
1.0, 1.5, 1.75	15	1150	1400x1800	CO 900	2500x2200	2500x2300
				SO 1100/1200 *	2500x2250	2500x2450
	16	1250	1400x1950	CO 900	2500x2350	2500x2450
				SO 1100/1200 *	2500x2400	2500x2600
	18	1350	1400x2100	CO 900	2500x2500	2500x2600
				SO 1100/1200 *	2500x2550	2500x2750
	21	1600	1400x2400	CO 900	2500x2800	2500x2900
				SO 1100/1200 *	2500x2850	2500x3050
	26	2000	1600x2500	SO 1100 SO 1200/1300/1400 *	2700x2950	2700x3150

PLANNING GUIDE FOR DIMENSIONS (WIDE CAR) 1150 - 2000kg

Speed(m/s)	Capacity		Car Size CWxCD(mmxmm)	Door Opening(mm)	Std. Hoistway Size / HWxHD (mmxmm)	
	Person	Load(kg)			Single Opening	Through Opening
1.0, 1.5,1.75	15	1150	1800x1400	CO 1000	2900x1850	2900x1900
				SO 1100/1200 *	2900x1850	2900x2050
	16	1250	1950x1400	CO 1100	3050x1850	3050x1900
				SO 1200/1300 *	3050x1850	3050x2050
	18	1350	1950x1500	CO 1100	3050x1900	3050x2000
				SO 1200/1300 *	3050x1950	3050x2150
	21	1600	1950x1700	CO 1100	3050x2100	3050x2200
				SO 1200/1300/1400 *	3050x2150	3050x2350
	26	2000	1950x2100	CO 1100	3050x2500	3050x2600
				SO 1200/1300/1400 *	3050x2550	3050x2750

PLANNING GUIDE FOR DIMENSIONS (Overhead and Pit for A920)

Speed (mm)	Std. OH (mm)	Min. OH (mm)	Std. PIT (mm)	Min. PIT (mm)	Car Clear Height (CIH) (mm)	Door Height (mm)
1.0	4300	4150	1650	1600	2200 (with 100mm false ceiling)	2100
1.5	4450	4300	1750	1700		
1.75	4500	4350	1800	1800		

PLANNING GUIDE FOR DIMENSIONS (Overhead and Pit for A930-L)


Speed (mm)	Max. Travel (m)	Std. OH (mm)	Min. OH (mm)	Std. PIT (mm)	Min. PIT (mm)	Car Clear Height (CIH) (mm)	Door Height (mm)
1.0	40	3850	3700	1650	1600	2200 (with 100mm false ceiling)	2100
1.5	60	4000	3800	1750	1700		
1.75	75	4050	3850	1800	1800		

Note: For 2000kg, OH or PD should increase by 200mm based on the table above.

* optional


Lift SHaft-SECTION VIEW

A920

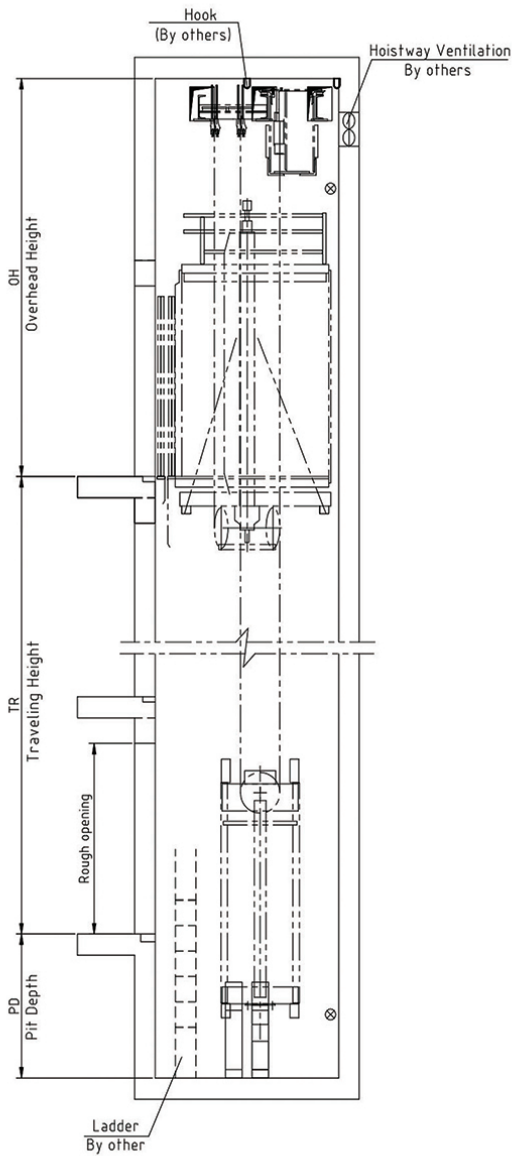


TOP LANDING

A920




Lift SHaft-SECTION VIEW

A930-L

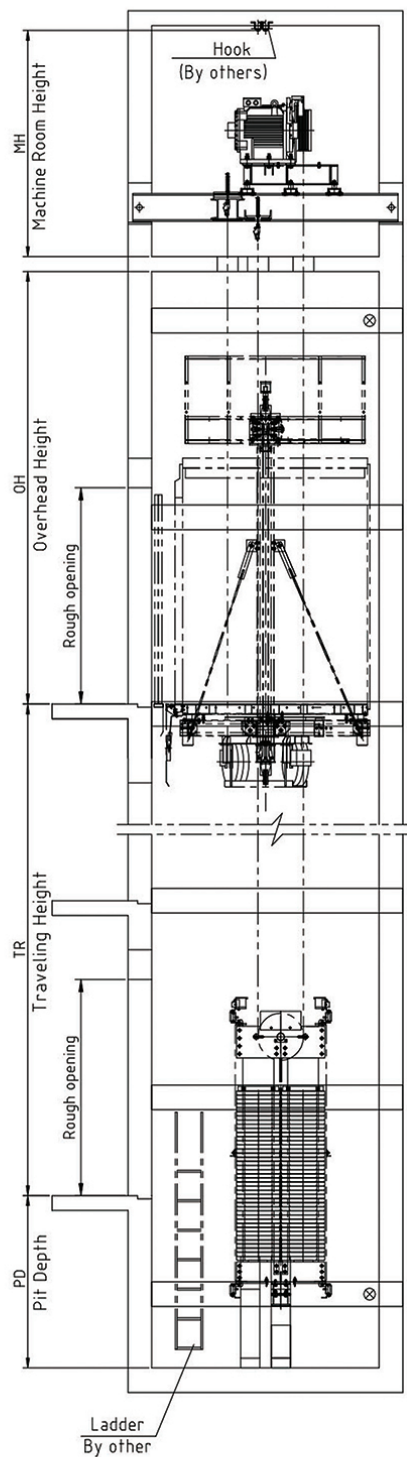


HOISTWAY PLAN

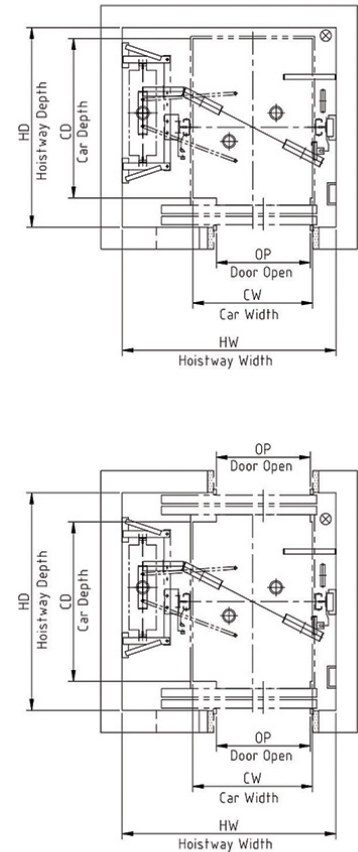

MACHINE ROOM PLAN

A930-L

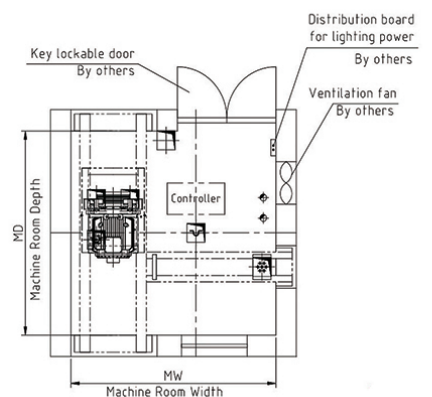

PLANNING GUIDE FOR DIMENSIONS (DEEP CAR) 1000 - 1600kg -- 1-2.5mps

Speed(m/s)	Capacity		Car Size CWxCD (mmxmm)	Door Opening(mm)	Std. Hoistway Size / HWxHD (mmxmm)	
	Person	Load(kg)			Single Opening	Through Opening
1.0, 1.5, 1.75, 2.0, 2.5	13	1000	1100x2100	CO 800	2050x2500	2050x2600
				CO 900 *	2150x2500	2150x2600
				SO 900*	2050x2550	2050x2750
	15	1150	1200x2100	CO 800	2150x2500	2150x2600
				CO 900 *	2250x2500	2250x2600
				SO 900/1000*	2150x2550	2150x2750
	16	1250	1400x1950	CO 900	2300x2350	2300x2450
				CO 1000 *	2400x2350	2400x2450
				SO 1000/1100/1200 *	2300x2400	2300x2600
	18	1350	1400x2100	CO 900	2300x2500	2300x2600
				CO 1000 *	2400x2500	2400x2600
				SO 1000/1100/1200 *	2300x2550	2300x2750
	21	1600	1400x2400	CO 900	2300x2800	2300x2900
				CO 1000 *	2400x2800	2400x2900
				SO 1000/1100/1200 *	2300x2850	2300x3050

PLANNING GUIDE FOR DIMENSIONS (WIDE CAR) 800 - 1600kg --1-2.5mps

Speed(m/s)	Capacity		Car Size CWxCD(mmxmm)	Door Opening(mm)	Std. Hoistway Size	Min. Hoistway Size
	Person	Load(kg)			HWxHD(mmxmm)	HWxHD(mmxmm)
1.0, 1.5,1.75, 2.0, 2.5	10	800	1400x1350	CO 900	2000x2150	2000x2100
	13	1000	1600x1400	CO 1000	2200x2200	2200x2150
	15	1150	1800x1400		2400x2200	2400x2150
	16	1250	1950x1400		2550x2200	2450x2150
	18	1350	1950x1500		2550x2300	2450x2250
	21	1600	1950x1700	CO 1100	2550x2500	2450x2450

PLANNING GUIDE FOR DIMENSIONS (Wide Car) 1000 - 2000kg -- 3-4mps

Speed(m/s)	Capacity		Car Size CWxCD(mmxmm)	Door Opening(mm)	Std. Hoistway Size
	Person	Load(kg)			HWxHD(mmxmm)
2.5, 3.0, 4.0	13	1000	1600x1400	CO 1000	2200x2200
	15	1150	1800x1400		2400x2200
	16	1250	1950x1400		2550x2200
	18	1350	1950x1500	CO 1100	2550x2300
	21	1600	1950x1700		2550x2500
	26	2000	2100x1900		2700x2700


PLANNING GUIDE FOR DIMENSIONS (Overhead and Pit)

Speed (mm)	Max. Travel (m)	Std. OH (mm)	Min. OH (mm)	Std. PIT (mm)	Min. PIT (mm)	Car Clear Height (CIH) (mm)	Door Height (mm)
1.0	40	4300	4150	1500	1450	2200 (with 100mm false ceiling)	2100
1.5	60	4400	4250	1600	1550		
1.75	75	4500	4300	1700	1600		
2.0/2.5	100/120	5100	4800	1900	1800		
3.0**	150	5450	5450	3350	3350	2400 (with 150mm false ceiling)	
3.5**	150	5550	5550	3350	3350		
4.0**	150	5650	5650	3350	3350		


* Optional

** OH and PD increase 50mm when capacity exceeds 1350kg (3-4mps)


Lift SHaft-SECTION VIEW

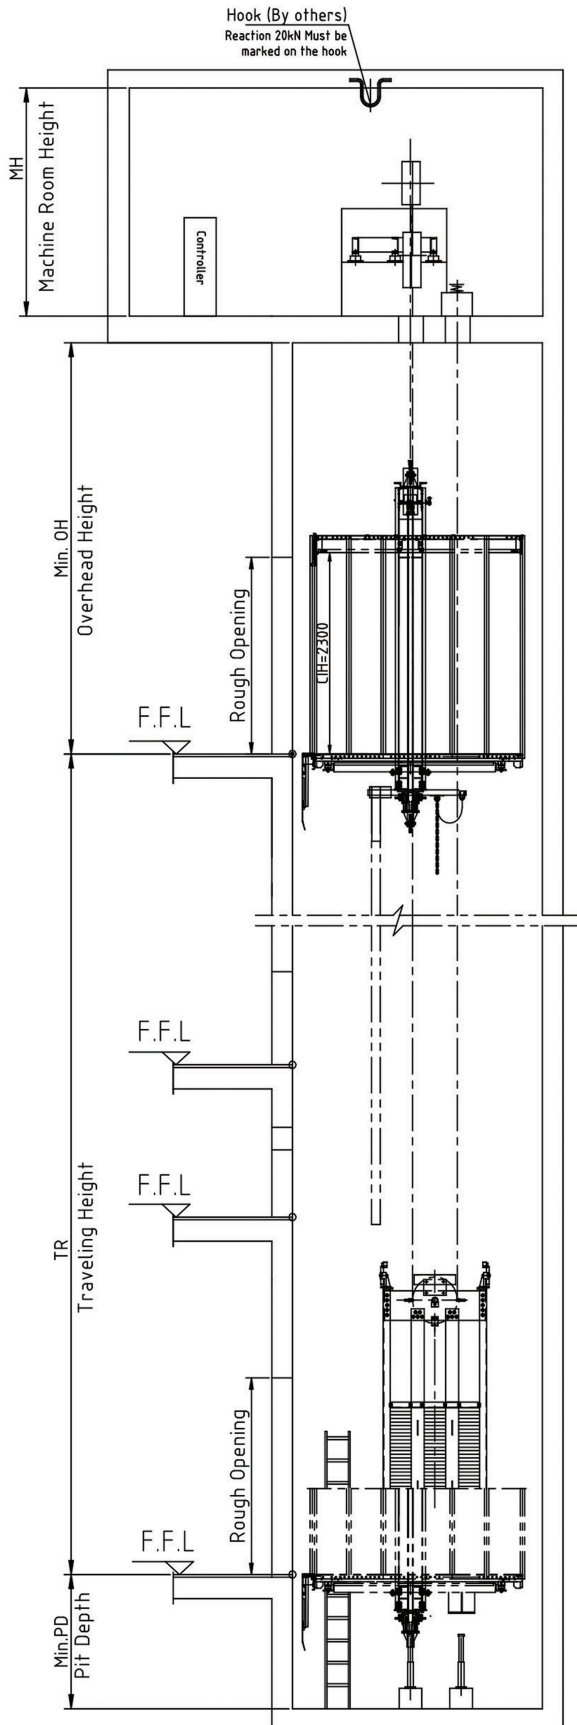


MACHINE ROOM PLAN

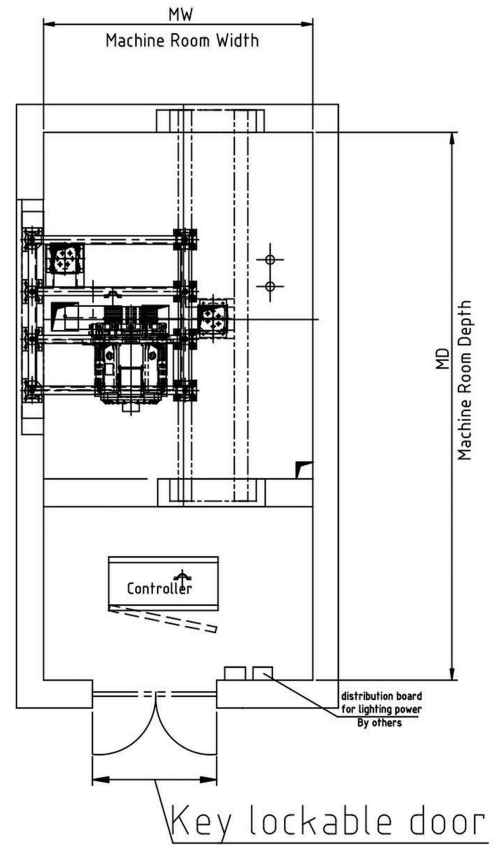


HOISTWAY PLAN

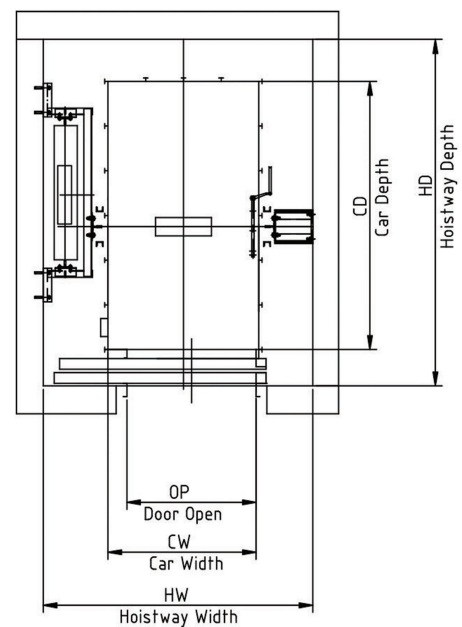

Lift SHaft-SECTION VIEW

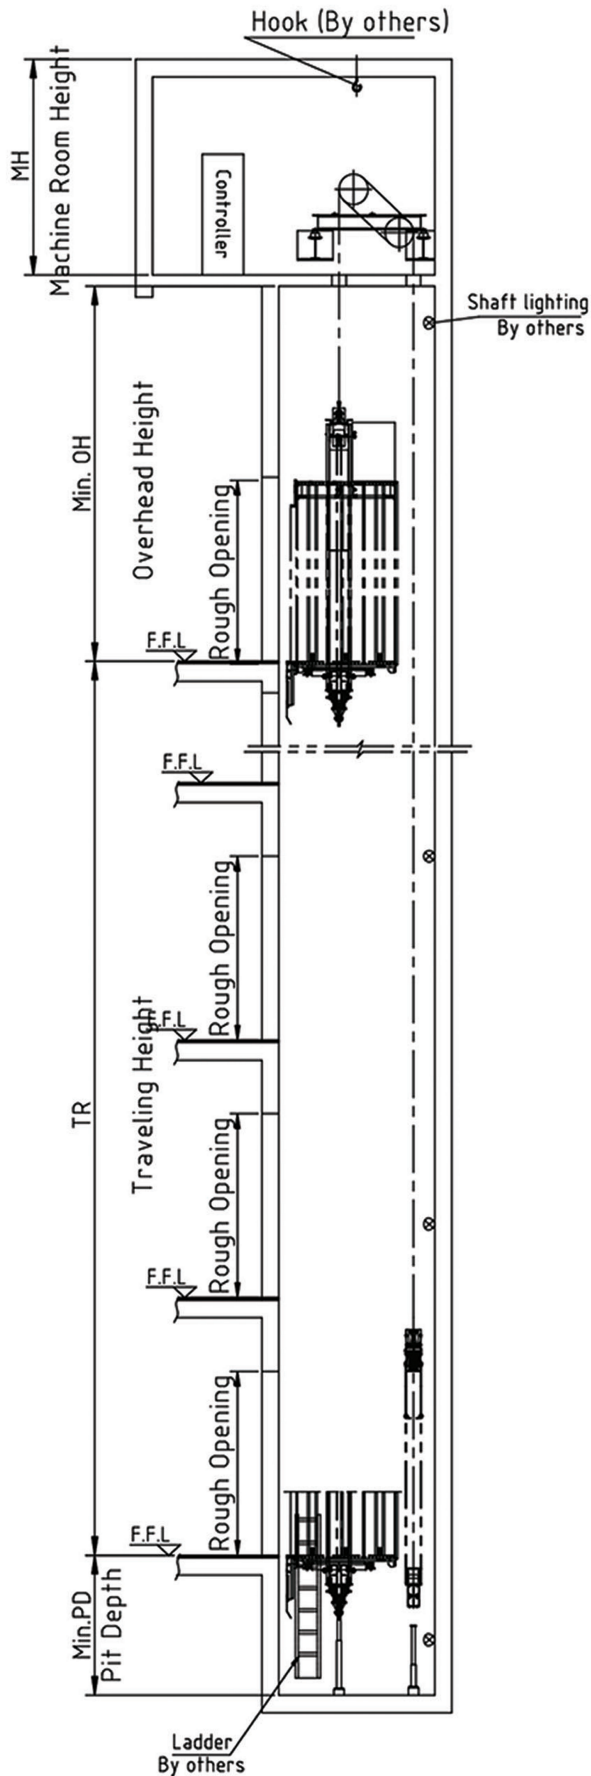

MACHINE ROOM PLAN

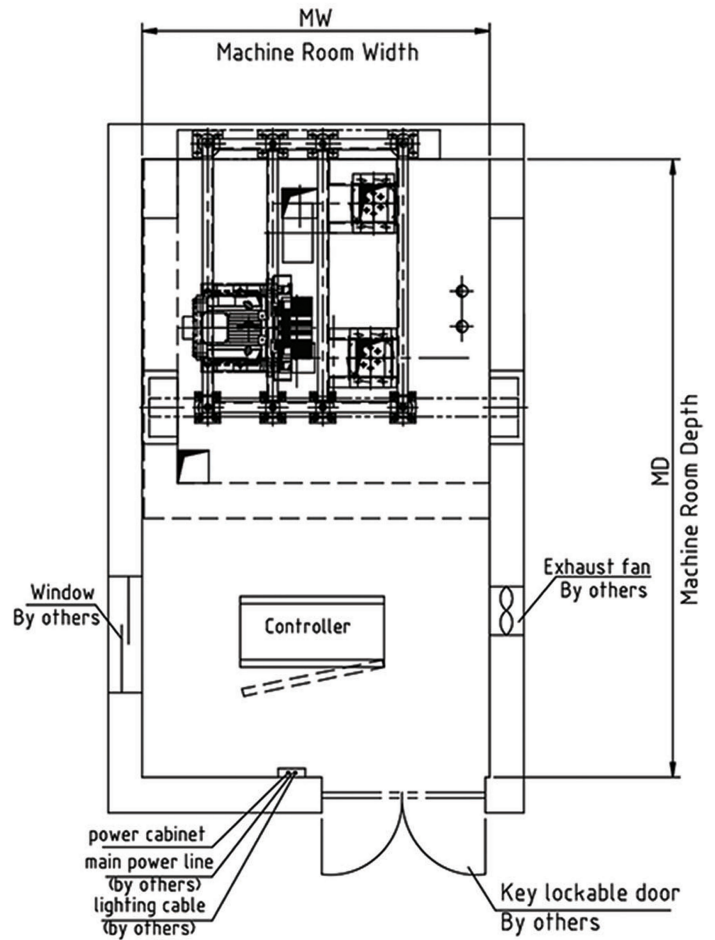

HOISTWAY PLAN

