
Schneider
Lift & Escalator
Since 1992
GMV
LIFT SYSTEMS
Home Lift
ELEVATING COMFORT
ENGINEERING EXCELLENCE

เปรียบเทียบลิฟต์บ้านสามระบบ

	Platform	Steel Belt	Screw
กลไกการทำงาน	ใช้ไฮดรอลิก สกรูหรือโซ่ดึง เฉพาะแผ่นพื้นผิวไร้ผนังตู้	มอเตอร์หมุน รอกดึงสายพาน	มอเตอร์หมุนน็อตตัวเมีย เพื่อไต่แกนสกรูแนวตั้ง
ความเร็วในการขึ้นลง	ต่ำมาก 0.15 | M เพื่อความปลอดภัย	สูงมาก 0.4–1.0+ | M	ต่ำมาก 0.15 | M เพื่อความปลอดภัย
ความนุ่มและเสียง	มีเสียงกลไกปานกลาง เคลื่อนตัวสม่ำเสมอและมั่นคง	เงียบและนุ่มนวลสูง ลดการเสียดสีของโลหะ	เงียบแต่มีแรงสั่นสะเทือน เล็กน้อยขณะเกลียวหมุน
การเตรียมบ่อลิฟต์	ไม่ต้องขุดบ่อหรือ ลึกเพียง 0 – 10 ซม.	ตื้น เพียง 10 – 30 ซม.	ไม่ต้องขุดบ่อหรือ ลึกเพียง 0 – 10 ซม.
Overhead	ต่ำมาก ไม่ต้องมีพื้นที่ ด้านบนโครงสร้าง	ต่ำ ตัวรอก ขนาดเล็กกว่าสลิงทั่วไป	ต่ำมาก ไม่ต้องมีพื้นที่ ด้านบนโครงสร้าง
ห้องเครื่อง	ไม่ต้องมีห้องเครื่อง	ไม่ต้องมีห้องเครื่อง	ไม่ต้องมีห้องเครื่อง
อายุการใช้งาน | การดูแล	ดูแลรักษาง่าย ชิ้นส่วนเคลื่อนไหวน้อย รอบเช็กระยะต่ำ	ยาวนาน สายพานทนทาน ไม่ต้องหยอดน้ำมันบ่อย	ยาวนาน ชิ้นส่วนเคลื่อนไหวน้อย และสารหล่อลื่น
ความเหมาะสม	บ้านที่ต้องการ ประหยัดพื้นที่	บ้านที่ต้องการ ความนุ่มนวล	บ้านสร้างเสร็จแล้ว หรือบ้านรีโนเวท

Schneider™ Lift & Escalator Since 1992

สอบถามเพิ่มเติม | รายละเอียด
089-699-1628
contact@asia-schneider.com

Why Choose Us.

Environmentally friendly & energy efficient products

ผลิตภัณฑ์ที่เป็นมิตรต่อสิ่งแวดล้อมและประหยัดพลังงาน

Technical manuals & wiring diagrams are readily available

มีคู่มือทางเทคนิคและแผนการเดินสายไฟพร้อมใช้งาน



Design & manufacture elevator controller based on German Technology

ออกแบบ & ผลิตคอนโทรลเลอร์ลิฟต์ด้วยเทคโนโลยีจากเยอรมัน

Hotline 24/7 with technicians ready nationwide for emergency service. Fully stocked elevator spare parts are provided.

สายด่วนตลอด 24 ชั่วโมง พร้อมช่างเทคนิคให้บริการฉุกเฉินทั่วประเทศ มีอะไหล่ลิฟต์ครบครัน

No monopoly on spare parts

ไม่ผูกขาดอะไหล่

Prioritize user-friendly features & easy trouble shooting system

ออกแบบเพื่อให้ใช้งานง่าย พร้อมการตรวจสอบและแก้ไขปัญหาได้อย่างสะดวก

Able to provide customized designs

สามารถออกแบบตามความต้องการของลูกค้า

Innovative, safe, reliable & intelligent products

นวัตกรรม, ความปลอดภัย, ไว้วางใจได้ & ผลิตภัณฑ์อัจฉริยะ

Schneider™
Lift & Escalator
Since 1992

Milestone Roadmap

2003
Asia Schneider (Thailand) Established
Mr. Raymond, a Malaysian MD with experience at Schindler, OTIS and Toshiba, partnered with Mr. Anton of Schneider Steuerungstechnik GmbH who produced the world's first single-board microprocessor-based control system for elevators

2005
"Lisa Schneider" Trademark Registered
The Lisa Schneider trademark was officially registered, formalizing the company's brand identity.

2015
M10-9 Controller System Launched
M10-9 Controller System Launched
The new Schneider Elevator Controller System M10-9 launched — an integrated system with inverter.



2018
Schneider (Shandong) Joint Venture
Established joint venture to initiate Schneider (Shandong) Elevator Co., Ltd. with a total investment cost of more than USD 2.4 billion.





2025
Technical Co-operation with GMV
Partnership with GMV, world No.1 in Hydraulic Elevators. Service now spans every region in "Thailand"

2024
Remote Elevator Monitoring System
Launched a system that monitors the status of lifts online via computer or mobile phone

2023
MOU with Kasetsart University, Sakonnakorn
Promoting academic collaboration and technological development.

2022
MOU with Nakornphanom University
Signed a Memorandum of Understanding to further strengthen academic partnership.

2021
Door Drive
With in-house R&D, Schneider door drive was launched.



2020
MOU with Sakon Nakorn Technical College
Signed a Memorandum of Understanding to support technical education and training.

Schneider Lift & Escalator Since 1992

Customer









































Schneider Lift & Escalator Since 1992

สอบถามเพิ่มเติม | รายละเอียด
089-699-1628
contact@asia-schneider.com

Home Lift Project Reference

Village





Treston Rama 3
- 16 Units -





Haus 22 Sathorn
- 24 Units -

Private Residences







Home Lift – Customized Design

Belt / Rope Type



Aluminium Shaft Color

Gray Blue | White Cream | Smoke Gray

White Grey | Light Burgundy | Navy Blue

Light Gold | Olive Green | Black

Ceiling

ASF-DD21 | ASF-DD35 | ASF-DD32

ASF-DD70 | ASF-DD55 | ASF-DD56

ASF-DD53 | ASF-DD39 | ASF-DD50

Touch Screen COP



COP-12KNOB

COP-TH15.6



COP-TH18.5



COP-TH10.1



Inside Decoration
For Enclosed Lift

ASV-B006



ASV-E002



ASV-B020



ASV-B001



ASV-B002



ASV-B021

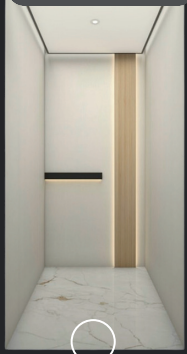

ASV-B010

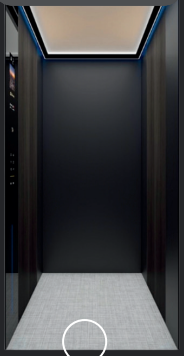

ASV-R001



ASV-R005



Cabin Floor Finishes

ASF-S02



ASF-F01



ASF-M02



ASF-S01



ASF-FR01



ASF-FR09



ASF-FR13



ASF-W03



Handrail
Customized Color

ASH-FS09



ASH-FS10



ASH-FS12



ASH-FS13



ASH-FS14



ASH-FS15



ASH-M04



ASH-M03



HOP

HOP-TH2.1



HOP-TH1.28



HOP-TH1.69



2.8LOP



GS-2.99B



Home Lift Technical Data
Rope / Belt Type

Note: The drawings and specifications shown are for reference only.

APEX ทนทานสูง (Rope Type)

Model	Counter weight	Shaft	Load (kg)	Car Size W×D×H (mm)	Hoistway Size W×D (mm)	Door Opening W×H (mm)	Speed (m/s)	Overhead Height (mm)	Pit Depth (mm)
Apex - CS	Side	Concrete (customer)	320	1000 x 1000 x 2200	1600 x 1400	C0750 x 2100	0.4	≥ 3100	≥ 400
Apex - CS	Side	Concrete (customer)	400	1200 x 1000 x 2200	1800 x 1400	C0800 x 2100	0.4	≥ 3100	≥ 400
Apex - AS	Side	Aluminum (factory)	260	900 x 900 x 2200	1500 x 1300	C0700 x 2100	0.4	≥ 3100	≥ 400
Apex - AS	Side	Aluminum (factory)	320	1000 x 1000 x 2200	1600 x 1400	C0750 x 2100	0.4	≥ 3100	≥ 400
Apex - AS	Side	Aluminum (factory)	400	1200 x 1000 x 2200	1800 x 1400	C0800 x 2100	0.4	≥ 3100	≥ 400
Apex - CR	Rear	Concrete (customer)	260	900 x 900 x 2200	1300 x 1500	L0650 x 2100	0.4	≥ 3500	≥ 400
Apex - CR	Rear	Concrete (customer)	320	1000 x 1000 x 2200	1400 x 1600	L0700 x 2100	0.4	≥ 3500	≥ 400
Apex - CR	Rear	Concrete (customer)	400	1200 x 1000 x 2200	1600 x 1550	C0750 x 2100	0.4	≥ 3500	≥ 400
Apex - AR	Rear	Aluminum (factory)	260	900 x 900 x 2200	1300 x 1500	L0650 x 2100	0.4	≥ 3500	≥ 400
Apex - AR	Rear	Aluminum (factory)	320	1000 x 1000 x 2200	1400 x 1600	L0700 x 2100	0.4	≥ 3500	≥ 400
Apex - AR	Rear	Aluminum (factory)	400	1200 x 1000 x 2200	1600 x 1550	C0700 x 2100	0.4	≥ 3500	≥ 400

ARIS เทคโนโลยีล้ำสมัย (Belt Type)

Model	Counter weight	Shaft	Load (kg)	Car Size W×D×H (mm)	Hoistway Size W×D (mm)	Door Opening W×H (mm)	Speed (m/s)	Overhead Height (mm)	Pit Depth (mm)
Aris - CS	Side	Concrete (customer)	260	900 x 900 x 2200	1500 x 1300	C0700 x 2100	0.4	≥ 3100 (belt sheave at bottom) / ≥ 3500 (belt sheave top-hung)	≥ 400 (belt sheave at bottom) / ≥ 250 (belt sheave top-hung)
Aris - CS	Side	Concrete (customer)	320	1000 x 1000 x 2200	1600 x 1400	C0750 x 2100	0.4	≥ 3100 (belt sheave at bottom) / ≥ 3500 (belt sheave top-hung)	≥ 400 (belt sheave at bottom) / ≥ 250 (belt sheave top-hung)
Aris - CS	Side	Concrete (customer)	400	1200 x 1000 x 2200	1800 x 1400	C0800 x 2100	0.4	≥ 3100 (belt sheave at bottom) / ≥ 3500 (belt sheave top-hung)	≥ 400 (belt sheave at bottom) / ≥ 250 (belt sheave top-hung)
Aris - AS	Side	Aluminum (factory)	260	900 x 900 x 2200	1500 x 1300	C0700 x 2100	0.4	≥ 3100 (belt sheave at bottom) / ≥ 3500 (belt sheave top-hung)	≥ 400 (belt sheave at bottom) / ≥ 250 (belt sheave top-hung)
Aris - AS	Side	Aluminum (factory)	320	1000 x 1000 x 2200	1600 x 1400	C0750 x 2100	0.4	≥ 3100 (belt sheave at bottom) / ≥ 3500 (belt sheave top-hung)	≥ 400 (belt sheave at bottom) / ≥ 250 (belt sheave top-hung)
Aris - AS	Side	Aluminum (factory)	400	1200 x 1000 x 2200	1800 x 1400	C0800 x 2100	0.4	≥ 3100 (belt sheave at bottom) / ≥ 3500 (belt sheave top-hung)	≥ 400 (belt sheave at bottom) / ≥ 250 (belt sheave top-hung)

Platform Home Lift – Customized Design

Platform Type

Inside Decoration



Optional | Optional | Standard | Standard

Aluminium Shaft



Light Blue | Light Yellow | Dark Gray

Ceiling

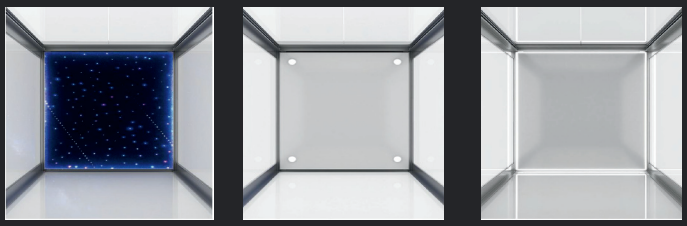

Star Ceiling + Atmosphere Light | Acrylic + Spotlight | Acrylic + Surrounding Light



White | Rose Gold

Hoistway Glass Colors



Smoke Gray | Frosted | Transparent | Milk White

Floors

PVC Floor | Woven Carpet



Home Lift Technical Data

Platform Type - Vista ห้องโดยสารที่กว้างขึ้น

Note : The drawings and specifications shown are for reference only.

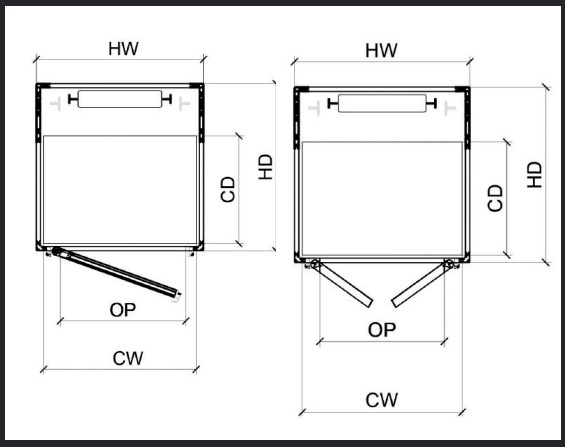

VISTA - R
Technical Data

Model	Vista - R Min	Vista - R Max	Vista - R Min
HW Shaft Width	850mm	1250mm	890mm
HD Shaft Depth	1000mm	1550mm	1000mm
CW Cat Width	765mm	1165mm	805mm
CD Cat Depth	645mm	1095mm	645mm
Door Opening Width	600mm	900mm	600mm
KG Load	320kg	320kg	320kg
Door Opening Mode	Manual swing door	Manual swing door	Center opening swing door
Speed (M/S)	0.25-0.3	0.25-0.3	0.25-0.3

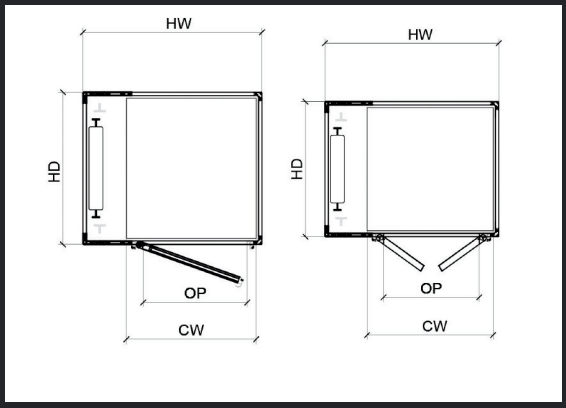

VISTA - S
Technical Data

Model	Vista - S Min	Vista - S Max	Vista - S Min
HW Shaft Width	1140mm	1550mm	1180mm
HD Shaft Depth	850mm	1250mm	850mm
CW Cat Width	805mm	1115mm	825mm
CD Cat Depth	765mm	1165mm	765mm
Door Opening Width	600mm	900mm	600mm
KG Load	320kg	320kg	320kg
Door Opening Mode	Manual swing door	Manual swing door	Center opening swing door
Speed (M/S)	0.25-0.3	0.25-0.3	0.25-0.3

Schneider™
Lift & Escalator
Since 1992

Home Lift

www.asia-schneider.com 0896991628 contact@asia-schneider.com

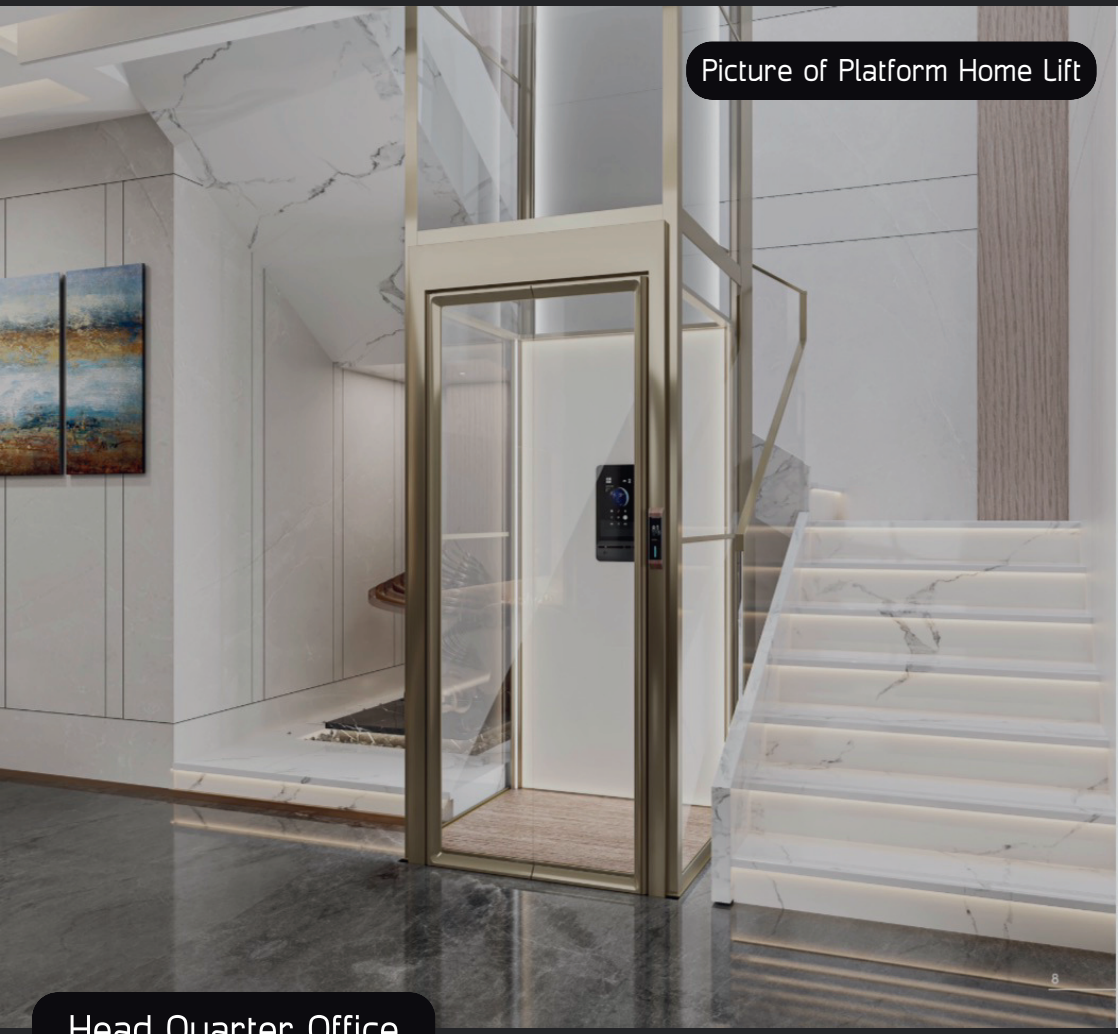

Picture of Platform Home Lift

Head Quarter Office

363, 365 Sukhapiban 5 Rd., Tarang,
Bangkhen, Bangkok 10220 Thailand

Elevating Comfort
Engineer Excellence

Provincial Office 6/12 Moo 2, T. Chalong, A. Muangphuket, Phuket 83130